

NT-5011 GSM RTU




Monitor 8 digital inputs
Monitor 4 analog inputs
Control 8 outputs via sms

Specifications	
DC Power supply	12-24V DC (Standard adapter: DC 12V/1.5A)
Power consumption	12V input Max. 150mA/Average 50mA
Frequency range	Quad-frequency 900/1800/850/1900MHz
SIM Card	Supporting 3V&1.8V SIM Card
Antenna	50 Ω SMA Antenna interface
Communication interface	RS-232C
Working temperature	-30°C ~ +70°C
Working humidity	Relative humidity 95%
Digital input	8 Digital inputs (dry contact)
Analog input	4 Analog inputs (4~20mA or 0~5V)
Output	8 Drivable relay outputs (open-collector outputs)
Output drive voltage	Equal to input DC voltage
Output drive power	Drive voltage ≤35V, drive current ≤500mA
Audio interface	3.5mm audio in and audio out
Exterior dimension	130×80×25mm
Weight	370G



- 4 AD inputs features**
- Preset high and low level
 - Every AD input current values can be query via sms
 - Configurable the alarm and recover message
 - Configurable for alarm ensure time
 - Configurable for alarm delay time
 - Configurable for offset and gain
 - Configurable for lag

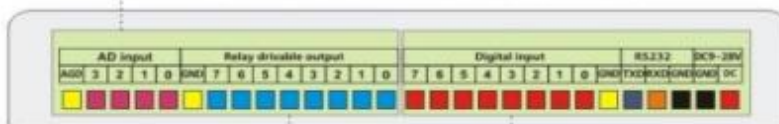

- 8 relay drivable outputs features**
- Multiple output type can be preset
 - Remote On/Off/Pulse outputs
 - Configurable for pulse time
 - Remote query outputs status
 - Outputs can be activated by alarm
 - Outputs can be activated by call
 - Outputs can be activated on schedule

- 8 digital inputs features**
- NO or NC type can be preset
 - Configurable for alarm and recover sms
 - Configurable for alarm ensure time
 - Configurable for alarm delay time
 - Configurable for service number's authority of receive inputs alarm
 - Remote query inputs status

Advance features

- Configurable for alarm and recover sms
- Automatically report the status of itself on schedule
- Support remote setting via sms commands
- Preset 10 phone numbers(can be distributed authority)
- Remote add/edit/delete phone group
- Automatically update internal clock via sms
- Time stamped in alarm or recover messages
- Support ring call when alarm
- Audio in and audio out can connect speak and mic
- Temperature sensor (optional)
- Internal battery and providing power cut off alarm
- Easy used GUI configure software
- Adopted highly integrated industrial CPU
- Reliable performance with built-in double watchdog
- Can execute preset tasks by re-defined conditions
- Low maintenance, 24*7 operation

How to setup

- Can be setup by free PC software via serial port
- Can be setup by cell phone via sms commands



When does GSM RTU send sms

- Digital inputs are triggered
- AD inputs are above preset range
- Send command via serial port
- Manual request by sms command
- External DC power off or recover
- On schedule, such as daily report, etc